


Product photo	Size	In A	Operating class	Order NO.	Fig.	Weight (g)
	10 x 38	01	gPV	01PV1038	Fig.3.1	10
		02		02PV1038		
		03		03PV1038		
		3.5		3.5PV1038		
		04		04PV1038		
		05		05PV1038		
		06		06PV1038		
		08		08PV1038		
		10		10PV1038		
		12		12PV1038		
		15		15PV1038		
		20		20PV1038		

Product photo	Size	Fuse Link Size	No. of poles	Order NO.	Fig.	Weight (g)
	Rated current 20A					
	ZT18-32	10 x 38	1	1PZT1832	Fig.3.2	59
			1+N	1NZT1832		118
			2	2PZT1832		118
			3	3PZT1832		177
			3+N	3NZT1832		236
	Rated current 20A					
	ZT18-32X with LED	10 x 38	1	1PZT1832X	Fig.3.2	59
			1+N	1NZT1832X		118
			2	2PZT1832X		118
			3	3PZT1832X		177
			3+N	3NZT1832X		236





Fig.3.1





Fig.3.2

Order No.	Current rating (Amps)	Energy Integrals (A2s/A2t)		Power Loss (Watts)	
		Pre-Arcing	Total at 1000V	0.8 In	In
01PV1038	1	0.15	0.4	0.8	1.5
02PV1038	2	1.2	3.4	0.6	1.0
03PV1038	3	4	11	0.8	1.3
3.5PV1038	3.5	6.6	18	0.9	1.4
04PV1038	4	9.5	26	1.0	1.5
05PV1038	5	19	50	1.0	1.6
06PV1038	6	30	90	1.1	1.8
08PV1038	8	3	32	1.2	2.1
10PV1038	10	7	70	1.2	2.3
12PV1038	12	12	120	1.5	2.7
15PV1038	15	22	220	1.7	2.9
20PV1038	20	34	350	2.1	3.6

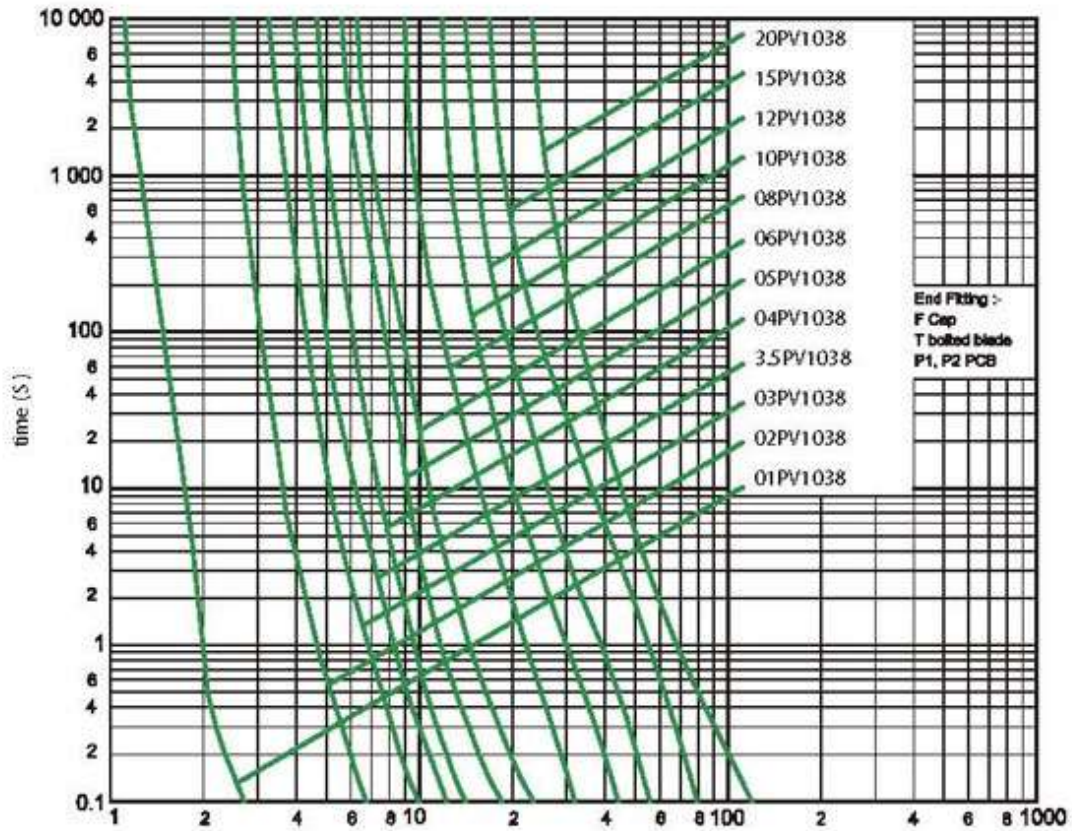

Perspective current, DC-time constant < 1 ms(Amp)